

Total Solution of Commercial Refrigerators

Foshan Nenwell Import & Export Trading Co., Ltd.

Foshan Nenwell Import Export Trading Co., Ltd.

Address: Rm 601, Bld# 5a Tianan Mansion, Jianping Rd,
Guicheng, Nanhai, Foshan, Guangdong, China

Tel:0086-757-85856069

<http://www.nenwell.com/>



Your Ideal One-Stop Supplier of Commercial Fridges

Nenwell, China tier 1 commercial refrigeration solution provider, with 7+ affiliated factories standing behind us, we are enduring in operating mass production and fast delivery for valued clients across the world. Alongside the decades since China's open policy in 90's, Nenwell took deep root in China commercial refrigeration industry and grew into a total solution provider of commercial refrigeration equipment, such as reach in refrigerator, glass door merchandiser, countertop fridge, back bar fridge, conventional fridges and freezers, and medical purpose refrigerators. Besides these commercial refrigerators, also we are supplying numerous components and fridge production lines. Nenwell Import and Export is our export outlet and the helper in pivoting global supply chain in this field across the world. We are committed to become your ideal one-stop supplier of freezers and coolers.



Barrel Can Cooler/Freezer Supermarket Refrigerator Medical Refrigerator Cake Showcase Countertop Chiller Ice Cream Refrigerator Slim Upright Freezer Upright Freezer

Nenwell, a Joint of High Quality upon Cost-Efficiency

Deeply rooted in China refrigeration industry for the past three decades, we have developed prominent expertise and leading technology which bring our manufacturing to world-class high quality. Quality and safety standards such as ISO90001, CE, RoHS, REACH, ETL, UL, NSF, CB, SAA and other norms are well met for different product lines. High quality products and efficient inner cost control empowers Nenwell to grow rapidly in the refrigeration field. Your one-stop refrigeration supplier is us as we run comprehensively full field refrigeration equipment, from cooler to freezer, from mini to large, from counter-top to free-standing, from complete units to components, and from products to production lines. We are professional in satisfying your OEM/ ODM and customized orders.

We help Boost Your Brand in Catering and Retailing



We are always one step ahead of the food service and retailing business. Our insights in stylish designs, illuminated visibility, energy saving technology can definitely boost your brand distribution and retailing sales. Remarkable acknowledgements are bestowed to Nenwell through trustworthy cooperations with famous clients home and abroad, such as Qingdao Beer, Tiger Beer, Polar Bear, Nestle', Meiji, Dairy Queen, Arum, Klondike, Cream Bell, Dairy Day, Igloo, Orchard Fresh, Cold Stone, Llaollao, Fruits, Amorino, Galadari and the list extends yearly.



Barrel Cooler



Countertop Chiller



Silm Upright Freezer



Upright Fridge



Cake Showcase



Ice Cream Showcase



Supermarket Merchandiser



Medical Refrigerator

2 ~ 8°C Pharmacy Refrigerator




4°C Blood Bank Refrigerator



-40°C Biomedical Freezer



Transport Cooler

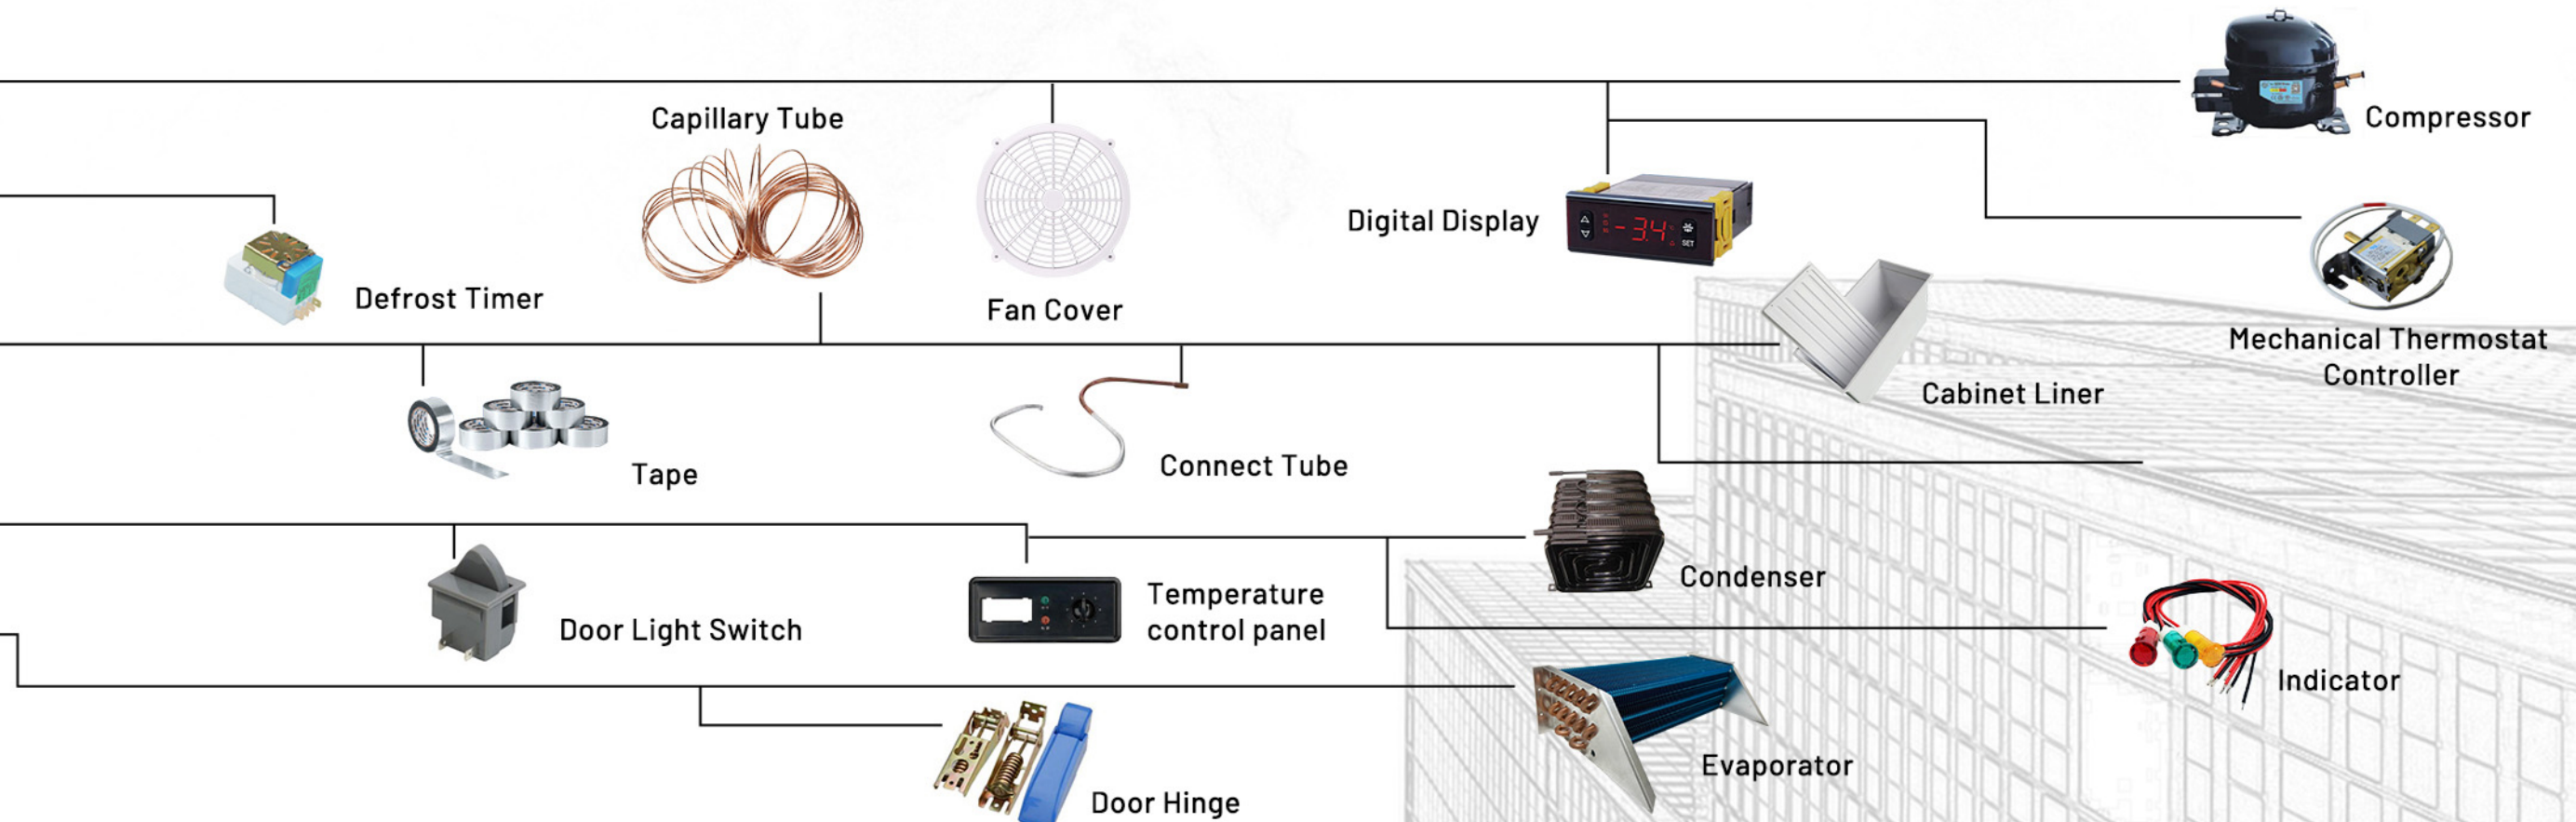

CATALOGUE

01

Adhesive Product


07

Door&Cabinet liner

08

Fan Cover&Drain Box

Aluminum Foil Tape for Machine

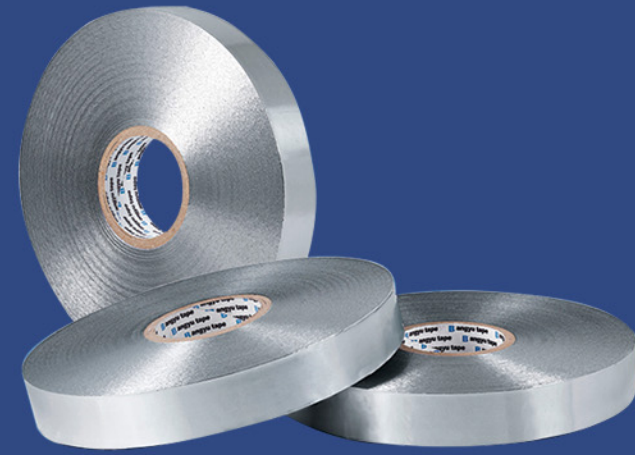

Features and Usage:

- Special designed for automatic paving machine
- Excellent toughness and tensile strength
- Applies to automatic paving of aluminum pipe for refrigerators and freezers

Product Parameters

Model	NWG801	NWG811	NWG88B	NWB38B
Material	BOPP film, aluminum foil, acrylic glue			aluminum foil, acrylic glue
Backing Thickness(mm)	0.013(13Mic)	0.015(15Mic)	0.035(35Mic)	0.04(40Mic)
Total Thickness(mm)	0.07(70Mic)	0.09(90Mic)	0.115(Mic)	0.08(80Mic)
180°Peeling Strength	≥12N/25MM			
Holding Power	24Hrs			
Initial Tack(Steel Ball)	15#			
Service Temperature	-20°C~+120°C			
Applying Temperature	0°C~+40°C			

Aluminum Foil Tape with Film




Features and Usage:

- Supper soft and easy tear
- Mainly suitable for manual laying and pasting of the inner bile of the refrigerators and freezers

Product Parameters

Model	NW-F10	NW-F801	NW-B801	NW-NF22	NW-F50
Material	Film, aluminum foil, acrylic glue				
Backing Thickness(mm)	0.01(10Mic)	0.013(13Mic)	0.013(13Mic)	0.022(22Mic)	0.05(50Mic)
Total Thickness(mm)	0.07(70Mic)	0.075(75Mic)	0.08(80Mic)	0.09(90Mic)	0.12(120Mic)
180°Peeling Strength	≥12N/25MM				
Holding Power	24Hrs				
Initial Tack(Steel Ball)	13#				
Service Temperature	-10°C~+120°C				
Applying Temperature	0°C~+40°C				

Aluminum Foil Tape without Liner

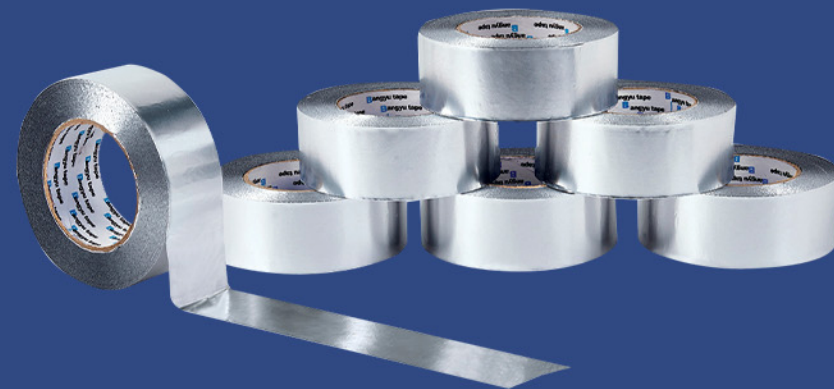


Features and Usage:

- Linerless aluminum foil tape has no release paper, good softness and easy to tear
- It is mainly used for the outer wrapping of the duct of the freezer
- Good aging resistance both indoors and outdoors
- Low moisture vapor transmission rate

Product Parameters

Model	NW-B25B	NW-B34B	NW-B38B	NW-B70B
Material	Aluminum foil, acrylic glue			
Backing Thickness(mm)	0.025(25Mic)	0.035(35Mic)	0.04(40Mic)	0.07(70Mic)
Total Thickness(mm)	0.65(65Mic)	0.075(75Mic)	0.08(80Mic)	0.11(110Mic)
180°Peeling Strength	≥12N/25MM			
Holding Power	24Hrs			
Initial Tack(Steel Ball)	15#			
Service Temperature	-20°C~+120°C			
Applying Temperature	0°C~+40°C			

Aluminum Foil Glass Fiber Cloth Tape

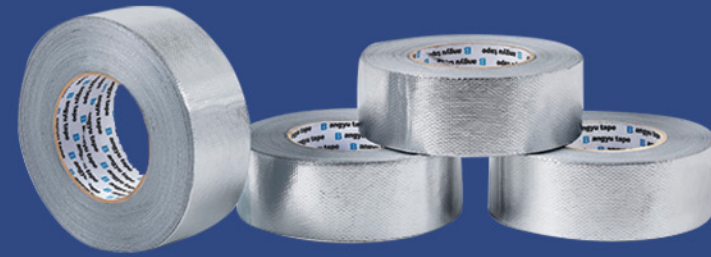


Features and Usage:

- With strong tensile force, anti-friction, high temperature resistance, solvent resistance, insulation, good flame resistance
- Widely used in transformers, high temperature equipment, air conditioner contactors, coil wrapping and motors and other high temperature special environment applications
- High quality adhesive with super strong adhesion and holding power
- Low moisture vapor transmission rate

Product Parameters

Model	NW-BXB
Material	Fiberglass cloth, acrylic glue, backing paper
Backing Thickness(mm)	/
Total Thickness(mm)	0.13(130Mic)
180°Peeling Strength	≥10N/25MM
Holding Power	10Hrs
Initial Tack(Steel Ball)	12#
Service Temperature	-10°C~+120°C
Applying Temperature	0°C~+40°C

Aluminum Foil Tape with Black Color

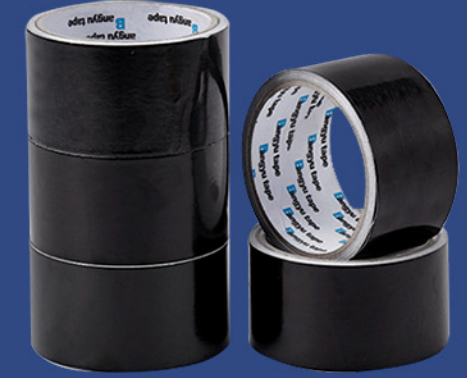


Features and Usage:

- Mainly used in the manufacture of computer monitors, computer peripheral wires and transformers, central air-conditioning pipelines, smoking machines, refrigerators, water heaters, etc. pipeline seams, wires, cables, precision electronic products, computer equipment, etc
- Coated with single side excellent black color
- Strong adhesion fit for sealing and bonding duct boards, flexible ducts and HVAC systems
- Aoolicable to workers operated under a low temperature

Product Parameters

Model	NW-BXB
Material	aluminum foil, acrylic glue, backing paper
Backing Thickness(mm)	0.02(20Mic)
Total Thickness(mm)	0.05(50Mic)
180°Peeling Strength	≥12N/25MM
Holding Power	24Hrs
Initial Tack(Steel Ball)	13#
Service Temperature	-10°C~+100°C
Applying Temperature	0°C~+40°C

Aluminum Foil Tape for Machine

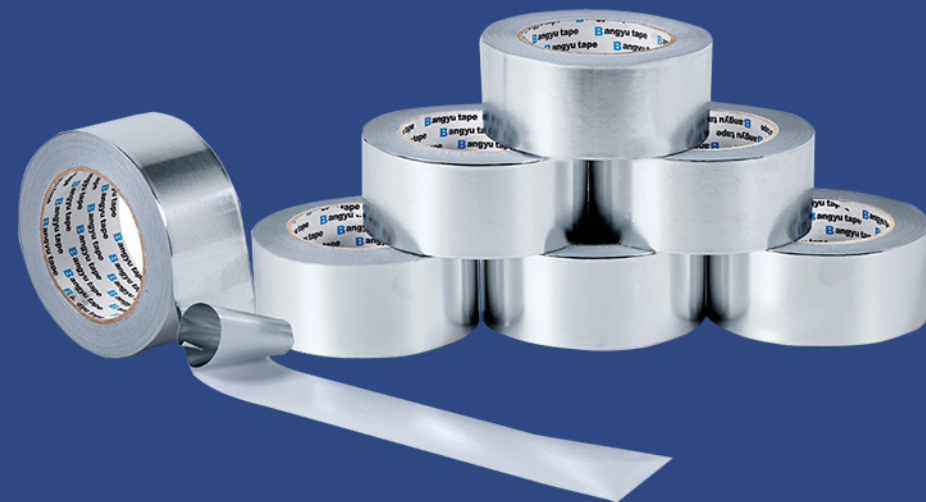

Features and Usage:

- Various specifications and thickness are available for selection
- Low moisture vapor transmission rate
- Mainly used for the joints of central air-conditioning pipes and as the outer protective layer of rock wool and glass wool
- It can also be used for packaging materials that require moisture-proof, anti-fog and anti-corrosion products

Product Parameters

Model	NW-D800	NW-D811	NW-D83	NW-D84	NW-85	NW-D858	NW-D87	NW-SD87	NW-D8100
Material	Film, aluminum foil, acrylic glue								
Backing Thickness(mm)	0.013(13Mic)	0.02(20Mic)	0.026(26Mic)	0.03(30Mic)	0.035(35Mic)	0.035(35Mic)	0.05(50Mic)	0.05(50Mic)	0.1(100Mic)
Total Thickness(mm)	0.04(40Mic)	0.05(50Mic)	0.06(60Mic)	0.065(65Mic)	0.07(70Mic)	0.08(80Mic)	0.09(90Mic)	0.1(100Mic)	0.15(150Mic)
180°Peeling Strength	≥12N/25MM								
Holding Power	24Hrs								
Initial Tack(Steel Ball)	15#								
Service Temperature	-20°C~+120°C								
Applying Temperature	0°C~+40°C								

Pet Tape >>>



Features and Usage:

- It has the characteristics of easy tear off, no residual glue, excellent temperature resistance, etc
- It is used in the fixed sealing of plastic household appliances, as well as in the finishing, surface fixing and foaming of electronic products
- It is also used in all aspects of the whole cabinet, wardrobe production and packaging
- Coated with solvent based acrylic adhesive or rubber based adhesive
- No residual & excellent temperature resistance

Product Parameters

Model	NW-PETC	NW-PETB	NW-PET10	NW-PET100	NW-PET500L
Material	Polyester film, rubber glue		Polyester film, oil glue		
Backing Thickness(mm)	0.036(36Mic)	0.036(36Mic)	0.036(36Mic)	0.036(36Mic)	0.033(33Mic)
Total Thickness(mm)	0.056(56Mic)	0.056(56Mic)	0.056(56Mic)	0.06(60Mic)	0.048(48Mic)
180°Peeling Strength	≥1.5N/25MM	≥3.5N/25MM	≥3.5N/25MM	≥5N/25MM	≥4N/25MM
Holding Power	24Hrs				
Initial Tack(Steel Ball)	5#	7#	5#	7#	5#
Service Temperature	-10°C~+80°C				
Applying Temperature	0°C~+40°C				

Non-Woven Tape



Product Parameters

Model	NW-TQ30
Material	Non-woven fabric, backing paper, acrylic glue
Backing Thickness(mm)	/
Total Thickness(mm)	0.15(150Mic)
180°Peeling Strength	≥2.5N/25MM
Holding Power	4Hrs
Initial Tack(Steel Ball)	9#
Service Temperature	0°C~+60°C
Applying Temperature	0°C~+40°C

Features and Usage:

Applicable for fridge and freezer

foaming process and also can be used for nameplate, film sitch bonding, foam material, sponge, fridge ecaporator, panel fixing, etc.

Masking Paper Tape



Product Parameters

Model	NW-13P2	NW-13P4
Material	Textured paper, rubber glue	
Backing Thickness(mm)	/	
Total Thickness(mm)	0.145(145Mic)	
180°Peeling Strength	≥4N/25MM	
Holding Power	4Hrs	
Initial Tack(Steel Ball)	13#	
Service Temperature	-10°C~+60°C	-10°C~+80°C
Applying Temperature	0°C~+40°C	

Features and Usage:


· Applicable for building decoration, color separarion, paint covering.

· Specially designed for automatic painting and baking finish


· No glue remaining after tearing

· Good heat resistance

Door Liner

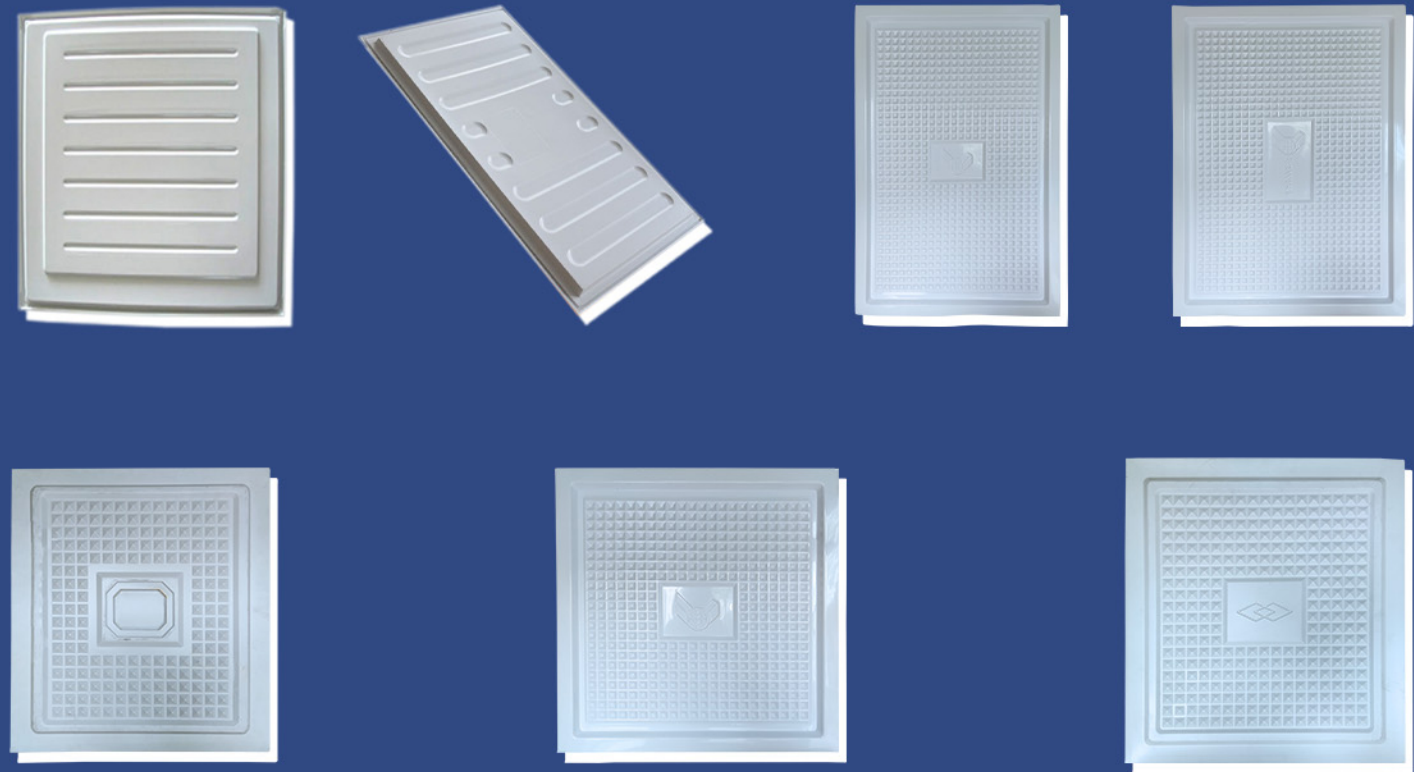

Cabinet Liner

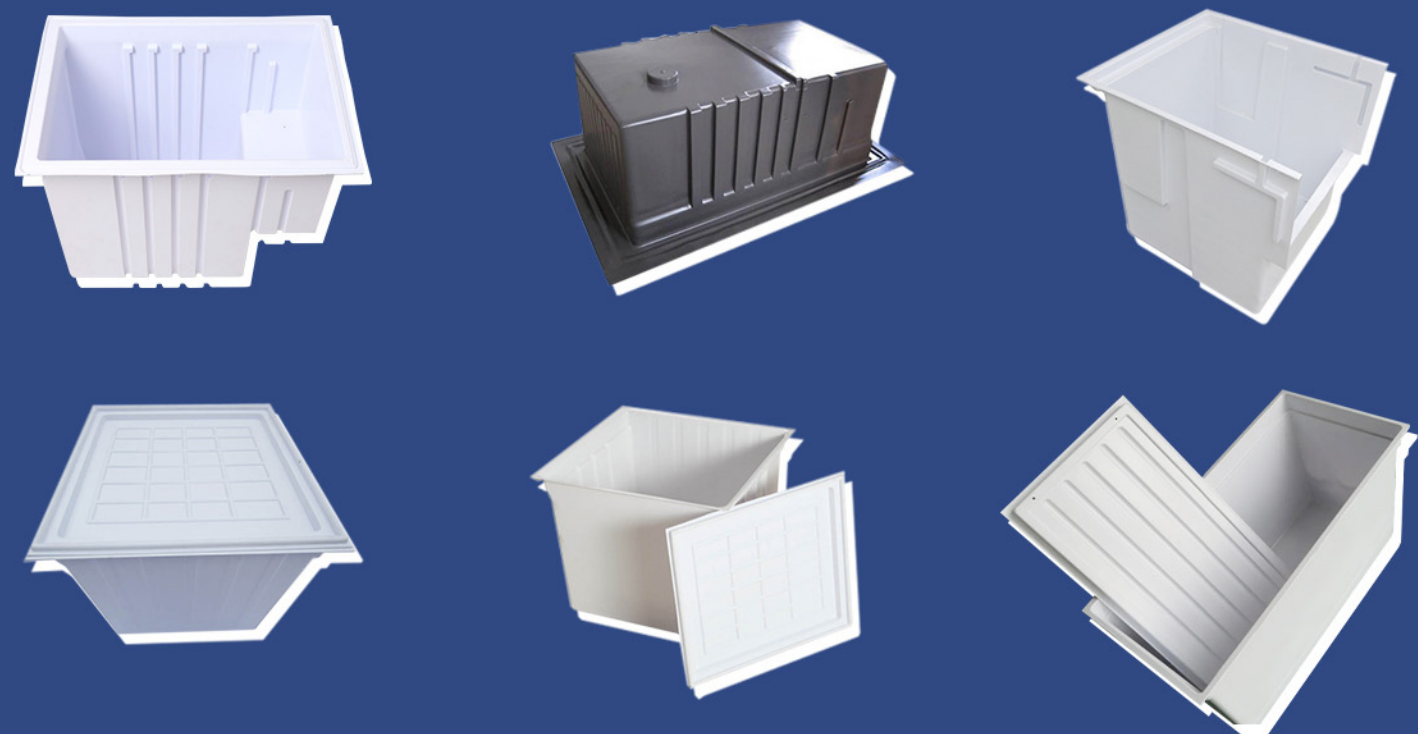


Fan Cover



Drain Box



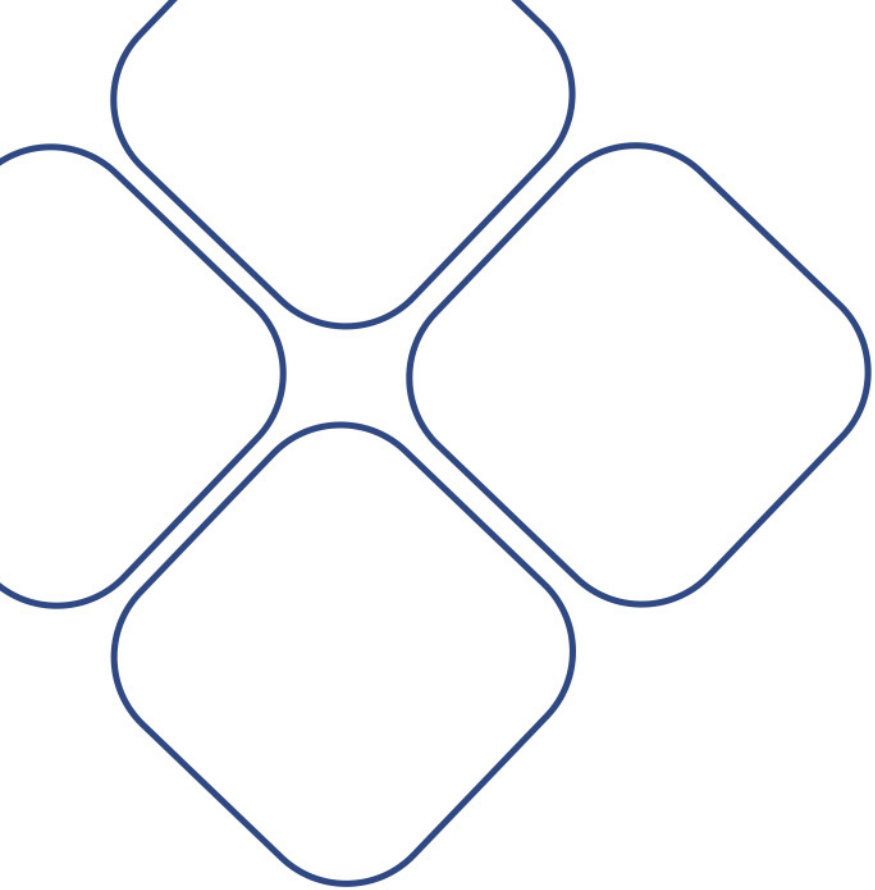

Total Solution of Commercial Refrigerators

Foshan Nenwell Import & Export Trading Co., Ltd.



Foshan Nenwell Import Export Trading Co., Ltd.

Address: Rm 601, Bld# 5a Tianan Mansion, Jianping Rd,
Guicheng, Nanhai, Foshan, Guangdong, China

Tel:0086-757-85856069

<http://www.nenwell.com/>