





Display Cooler & Freezer

Foshan Nenwell Import & Export Trading Co., Ltd.

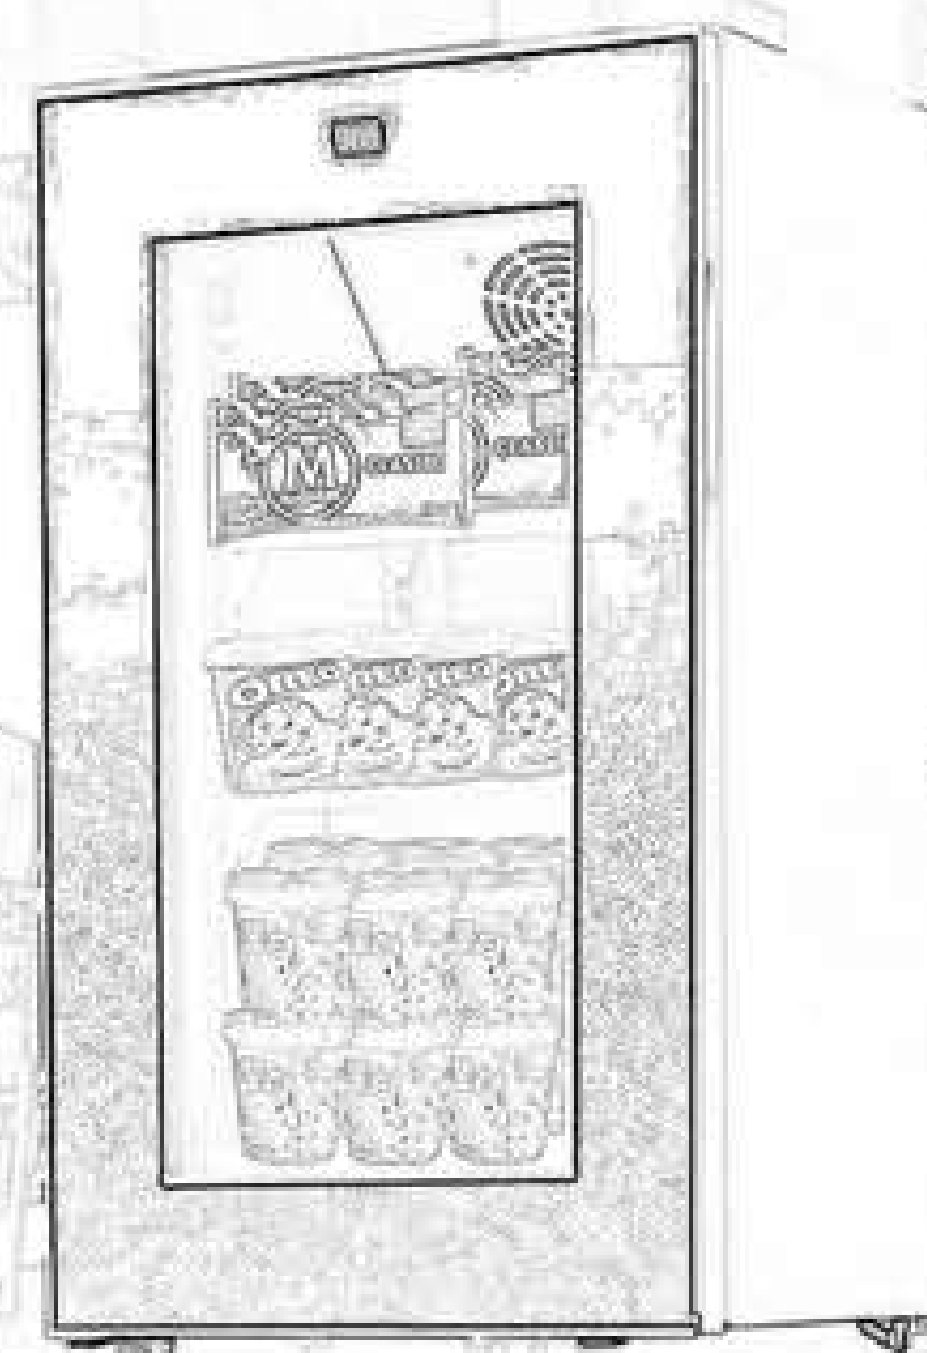

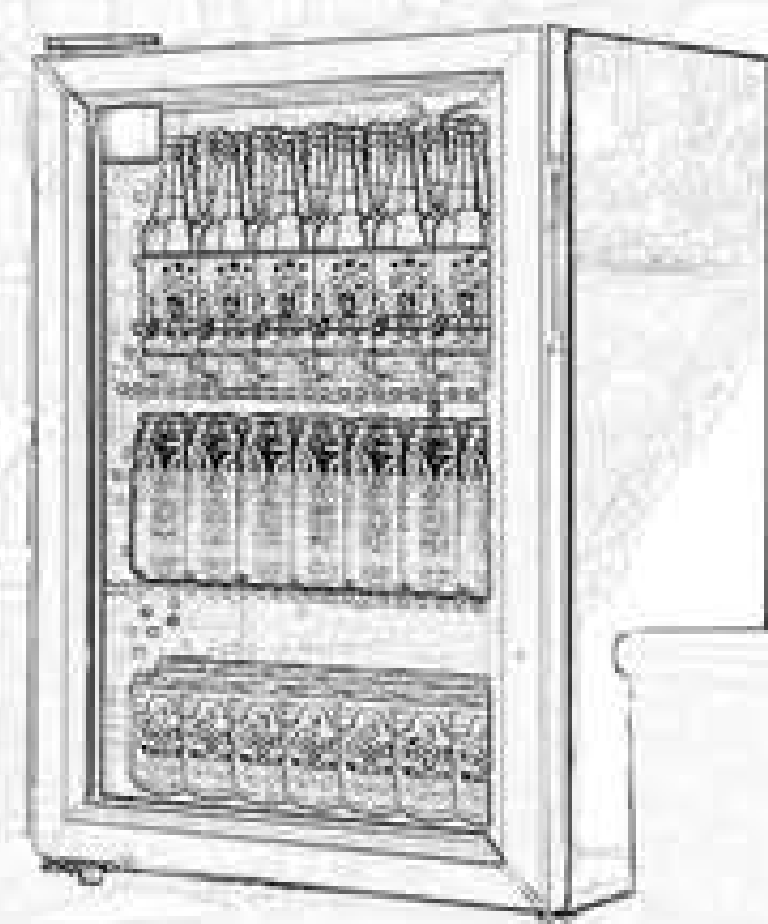

Your Ideal One-Stop Supplier of Commercial Fridges

Nenwell, China tier 1 commercial refrigeration solution provider, with 7+ affiliated factories standing behind us, we are enduring in operating mass production and fast delivery for valued clients across the world. Alongside the decades since China's open policy in 90's, Nenwell took deep root in China commercial refrigeration industry and grew into a total solution provider of commercial refrigeration equipment, such as reach in refrigerator, glass door merchandiser, countertop fridge, back bar fridge, conventional fridges and freezers, and medical purpose refrigerators. Besides these commercial refrigerators, also we are supplying numerous components and fridge production lines. Nenwell Import and Export is our export outlet and the helper in pivoting global supply chain in this field across the world. We are committed to become your ideal one-stop supplier of freezers and coolers.



Nenwell, a Joint of High Quality upon Cost-Efficiency

Deeply rooted in China refrigeration industry for the past three decades, we have developed prominent expertise and leading technology which bring our manufacturing to world-class high quality. Quality and safety standards such as ISO90001, CE, RoHS, REACH, ETL, UL, NSF, CB, SAA and other norms are well met for different product lines. High quality products and efficient inner cost control empowers Nenwell to grow rapidly in the refrigeration field. Your one-stop refrigeration supplier is us as we run comprehensively full field refrigeration equipment, from cooler to freezer, from mini to large, from counter-top to free-standing, from complete units to components, and from products to production lines. We are professional in satisfying your OEM/ ODM and customized orders.

We help Boost Your Brand in Catering and Retailing



We are always one step ahead of the food service and retailing business. Our insights in stylish designs, illuminated visibility, energy saving technology can definitely boost your brand distribution and retailing sales. Remarkable acknowledgements are bestowed to Nenwell through trustworthy cooperations with famous clients home and abroad, such as Qingdao Beer, Tiger Beer, Polar Bear, Nestle', Meiji, Dairy Queen, Arum, Klondike, Cream Bell, Dairy Day, Igloo, Orchard Fresh, Cold Stone, Llaollao, Froots, Amorino, Galadari and the list extends yearly.



Barrel Cooler



Countertop Chiller



Silm Upright Freezer



Upright Fridge



Cake Showcase



Ice Cream Showcase



Supermaket Merchandiser



Medical Refrigerator

2 ~ 8°C Pharmacy Refrigerator





4°C Blood Bank Refrigerator



-40°C Biomedical Freezer



Transport Cooler

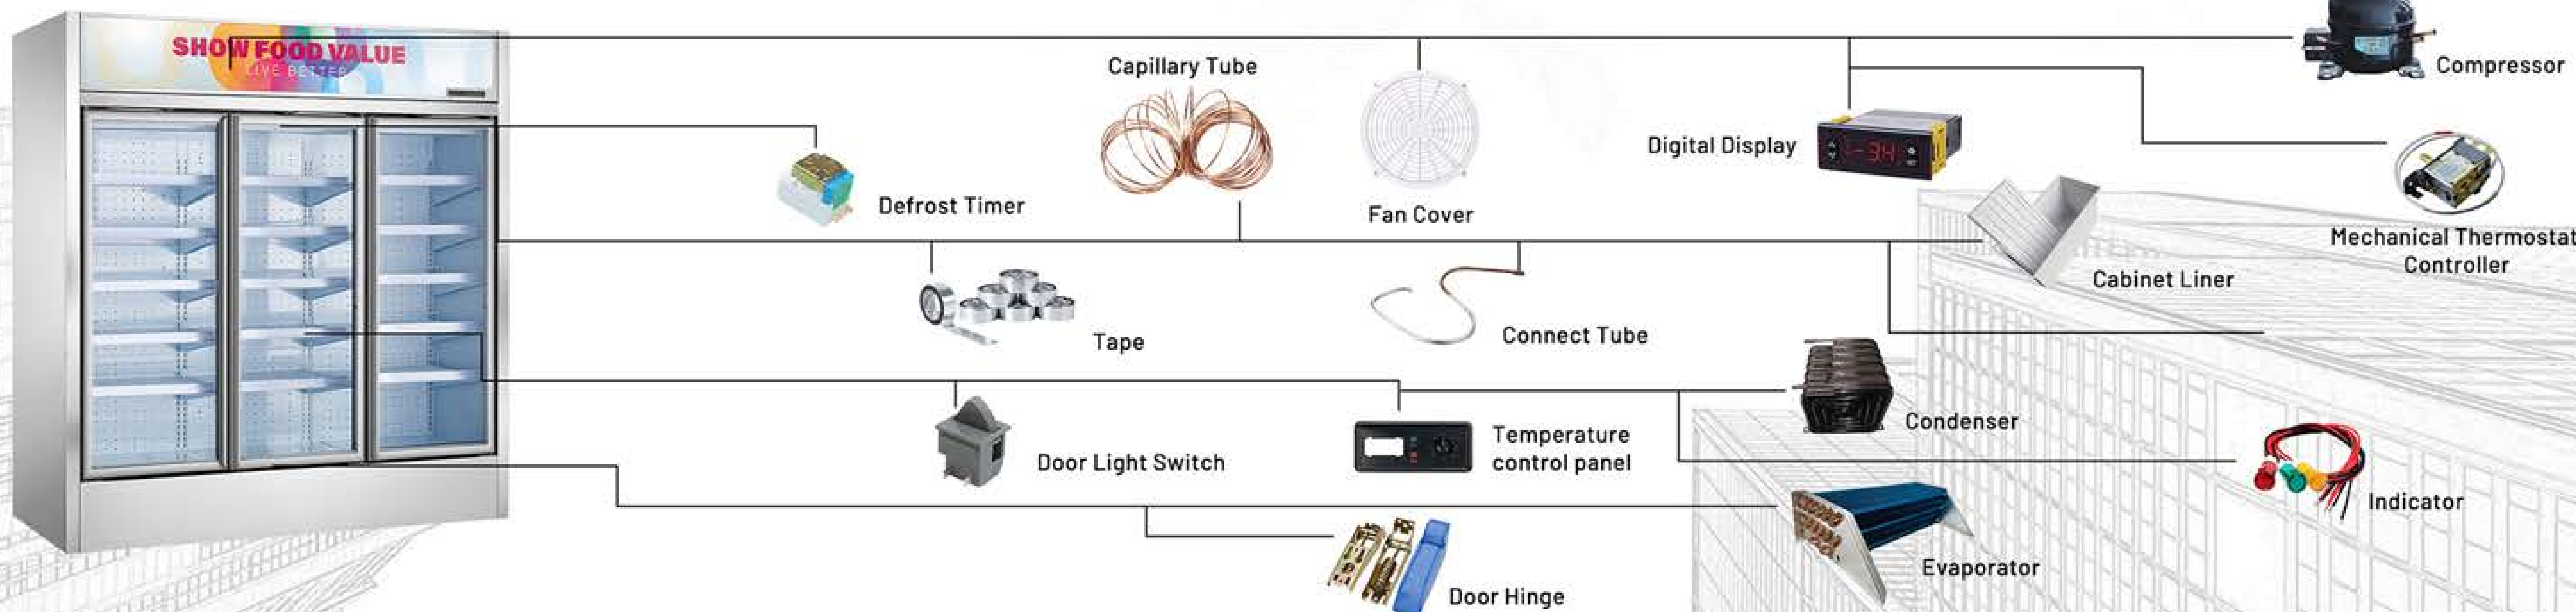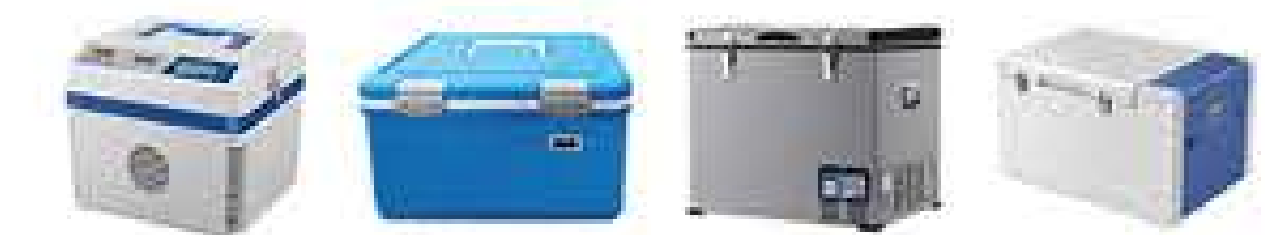

Display Cooler with Standard PVC Glass Door ● ●



Features and Benefits

- Adjustable fridge shelves
- Internal light for illumination
- Self-evaporation water tray, user-friendly
- Lock and safety concerns
- Customized side stickers for brand promotion

Certification:  CB CE SAA RoHS



Product Applications



Bar



Restaurant



Canteen



Party

Optional Details ● ●

Countertop Cooler: We supply various sizes of countertop mini coolers, from 5.5 to 130 Liters. Our mini fridge comes with a transparent front glass door, and is specially designed for drinks display and promotion on the countertop in shops, bars, restaurants, and hotels across the world.



Digital thermometer



Digital temperature control



Internal fan



Lock



LED light



Shelves

Customized Cases ● ●



NW-SC08



NW-SC21



NW-SC35



NW-SC52



NW-SC68



NW-SC98



NW-SC130

Product Parameters



Model No	NW-SC08
Unit Size (WxDxH) (mm)	220x495x390
Carton Size (WxDxH) (mm)	306x576x454
Capacity (L)	5.5
Temperature Range(°C)	0~10
N.W/G.W (kgs)	14/15.5
Input Power(W)	76
Power Consumption(Kw-h/24h)	0.6
Loading 20'FT/40'GP/40'HQ	380/760/884
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SC21
Unit Size (WxDxH) (mm)	350x420x495
Carton Size (WxDxH) (mm)	456x524x582
Capacity (L)	21
Temperature Range(°C)	0~10
N.W/G.W (kgs)	15/16.5
Input Power(W)	80
Power Consumption(Kw-h/24h)	0.6
Loading 20'FT/40'GP/40'HQ	220/440/440
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SC35
Unit Size (WxDxH) (mm)	360x425x501
Carton Size (WxDxH) (mm)	461x526x564
Capacity (L)	35
Temperature Range(°C)	0~10
N.W/G.W (kgs)	15.5/17.9
Input Power(W)	90
Power Consumption(Kw-h/24h)	0.6
Loading 20'FT/40'GP/40'HQ	215/435/440
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SC52
Unit Size (WxDxH) (mm)	435x500x501
Carton Size (WxDxH) (mm)	521x581x560
Capacity (L)	52
Temperature Range(°C)	0~10
N.W/G.W (kgs)	19.5/21.5
Input Power(W)	80
Power Consumption(Kw h/24h)	0.6
Loading 20'FT/40'GP/40'HQ	176/352/352
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SC98
Unit Size (WxDxH) (mm)	480x500x852
Carton Size (WxDxH) (mm)	562x552x897
Capacity (L)	98
Temperature Range(°C)	0~10
N.W/G.W (kgs)	28.8/30.55
Input Power(W)	95
Power Consumption(Kw h/24h)	1.5
Loading 20'FT/40'GP/40'HQ	80/168/252
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SC68
Unit Size (WxDxH) (mm)	435x500x687
Carton Size (WxDxH) (mm)	521x581x744
Capacity (L)	68
Temperature Range(°C)	0~10
N.W/G.W (kgs)	24/26
Input Power(W)	80
Power Consumption(Kw h/24h)	0.6
Loading 20'FT/40'GP/40'HQ	132/264/264
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SC130
Unit Size (WxDxH) (mm)	540x550x859
Carton Size (WxDxH) (mm)	591x621x894
Capacity (L)	130
Temperature Range(°C)	0~10
N.W/G.W (kgs)	40/43
Input Power(W)	95
Power Consumption(Kw h/24h)	1.5
Loading 20'FT/40'GP/40'HQ	54/160/208
Certification	CE,CB,ETL,ROHS,SAA

Display Cooler with Narrow PVC Glass Door



Features and Benefits

- Adjustable fridge shelves
- Internal light for illumination
- Self-evaporation water tray, user-friendly
- Lock and safety concerns
- Customized side stickers for brand promotion

Certification:  CB CE SAA RoHS



Product Applications



Bar



Restaurant



Canteen



Party

Optional Details

This series of products have 5 options liters for choice. It is designed with a Narrow PVC frame glass door, which makes it more elegant and concise. Also, have some special optional parts to meet your different demands. Mainly used in hotels, chain brand convenience shops, shopping malls, and other places with strict appearance requirements.



Top-grade narrow door frame



Digital temperature control



Internal fan



Lock



LED light



Shelves

Customized Cases



NW-SC21N



NW-SC35N



NW-SC52N



NW-SC68N



NW-SC98N

Product Parameters



Model No	NW-SC52N
Unit Size (WxDxH) (mm)	435x500x494
Carton Size (WxDxH) (mm)	521x581x560
Capacity (L)	52
Temperature Range(°C)	0~10
N.W/G.W (kgs)	20/22
Input Power(W)	82
Power Consumption(Kw-h/24h)	0.6
Loading 20'FT/40'GP/40'HQ	176/352/352
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SC21N
Unit Size (WxDxH) (mm)	350x420x488
Carton Size (WxDxH) (mm)	456x524x582
Capacity (L)	21
Temperature Range(°C)	0~10
N.W/G.W (kgs)	15/16.5
Input Power(W)	80
Power Consumption(Kw-h/24h)	0.6
Loading 20'FT/40'GP/40'HQ	220/440/440
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SC68N
Unit Size (WxDxH) (mm)	435x500x680
Carton Size (WxDxH) (mm)	521x581x744
Capacity (L)	68
Temperature Range(°C)	0~10
N.W/G.W (kgs)	24/26
Input Power(W)	80
Power Consumption(Kw-h/24h)	0.6
Loading 20'FT/40'GP/40'HQ	132/264/264
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SC35N
Unit Size (WxDxH) (mm)	360x425x494
Carton Size (WxDxH) (mm)	461x526x564
Capacity (L)	35
Temperature Range(°C)	0~10
N.W/G.W (kgs)	15.5/17.9
Input Power(W)	90
Power Consumption(Kw-h/24h)	0.6
Loading 20'FT/40'GP/40'HQ	215/435/440
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SC98N
Unit Size (WxDxH) (mm)	480x500x845
Carton Size (WxDxH) (mm)	562x552x897
Capacity (L)	98
Temperature Range(°C)	0~10
N.W/G.W (kgs)	28.8/30.55
Input Power(W)	95
Power Consumption(Kw-h/24h)	1.5
Loading 20'FT/40'GP/40'HQ	80/168/252
Certification	CE,CB,ETL,ROHS,SAA

Stainless Steel Display Cooler



Features and Benefits

Compressor refrigeration, forced fan cooling

Refrigerant: R134a, R600a

Temperature range: 0~10°C

Mechanical thermostat, adjustable shelves

Encaved logo on glass for option

Certification:  CB CE SAA RoHS



Optional Details



These countertop coolers use high-class stainless steel for both internal and external. Top grade and easier to clean. We could have encaved logo on the glass door and silk screen logo printing on the body too. It's specially designed for beverage display and promotion on the table in bars, restaurants, and shops.



Digital thermometer



Digital temperature control



Internal fan



Lock



LED light



Metal wire shelf

Customized Colors



NW-SC20SS



NW-SC50SS



NW-SC70SS

Product Applications



Bar



Restaurant




Canteen



Party



Product Parameters



Model No	NW-SC20SS
Unit Size (WxDxH) (mm)	350x420x495
Carton Size (WxDxH) (mm)	456x524x582
Capacity (L)	20
Temperature Range(°C)	0~10
N.W/G.W (kgs)	15/16.5
Input Power(W)	76
Power Consumption(Kw-h/24h)	0.6
Loading 20'FT/40'GP/40'HQ	220/440/440
Certification	CE,CB



Model No	NW-SC50SS
Unit Size (WxDxH) (mm)	435x500x501
Carton Size (WxDxH) (mm)	521x581x560
Capacity (L)	50
Temperature Range(°C)	0~10
N.W/G.W (kgs)	22/24
Input Power(W)	80
Power Consumption(Kw-h/24h)	0.8
Loading 20'FT/40'GP/40'HQ	280/600/600
Certification	CE,CB



Model No	NW-SC70SS
Unit Size (WxDxH) (mm)	435x486x685
Carton Size (WxDxH) (mm)	521x581x560
Capacity (L)	70
Temperature Range(°C)	0~10
N.W/G.W (kgs)	27/29
Input Power(W)	80
Power Consumption(Kw-h/24h)	0.8
Loading 20'FT/40'GP/40'HQ	132/276/276
Certification	CE,CB

Round Corner Display Cooler



Features and Benefits

- Brand-new round corner design
- Customized side stickers for brand promotion
- High visibility inner LED lighting
- Transparent tempered glass door
- Adjustable fridge shelves
- Lock & key for safety concerns
- Self-evaporation water tray, user-friendly

Certification:  CB CE SAA RoHS



Product Applications



Bar



Restaurant



Canteen



Party

Optional Details

We supply this round corner glass door countertop mini coolers, from 50 to 134 Liters. Our mini coolers come with round corner front glass door and is specially designed for drink display and promotion on the table in shops, bars, restaurants and hotels around the world.



Round Corner door



Digital temperature control



Internal fan



Lock



LED light



Shelves

Customized Colors



NW-SC52A



NW-SC56A



NW-SC68A



NW-SC76A



NW-SC106A

Product Parameters



Model No	NW-SC52A
Unit Size (WxDxH) (mm)	447x467x495
Carton Size (WxDxH) (mm)	521x581x560
Capacity (L)	50
Temperature Range(°C)	0~10
N.W/G.W (kgs)	22/24
Input Power(W)	110
Power Consumption(Kw-h/24h)	1
Loading 20'FT/40'GP/40'HQ	176/352/352
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SC76A
Unit Size (WxDxH) (mm)	495x450x670
Carton Size (WxDxH) (mm)	560x495x710
Capacity (L)	78
Temperature Range(°C)	0~10
N.W/G.W (kgs)	25/28
Input Power(W)	85
Power Consumption(Kw-h/24h)	0.86
Loading 20'FT/40'GP/40'HQ	132/354/354
Certification	CE,CB



Model No	NW-SC56A
Unit Size (WxDxH) (mm)	495x450x495
Carton Size (WxDxH) (mm)	560x495x535
Capacity (L)	49
Temperature Range(°C)	0~10
N.W/G.W (kgs)	20/22.5
Input Power(W)	75
Power Consumption(Kw-h/24h)	0.82
Loading 20'FT/40'GP/40'HQ	176/478/478
Certification	CE,CB



Model No	NW-SC106A
Unit Size (WxDxH) (mm)	495x450x825
Carton Size (WxDxH) (mm)	560x495x865
Capacity (L)	102
Temperature Range(°C)	0~10
N.W/G.W (kgs)	29.5/33
Input Power(W)	96
Power Consumption(Kw-h/24h)	0.92
Loading 20'FT/40'GP/40'HQ	112/288/288
Certification	CE,CB




Model No	NW-SC68A
Unit Size (WxDxH) (mm)	447x467x680
Carton Size (WxDxH) (mm)	521x581x744
Capacity (L)	68
Temperature Range(°C)	0~10
N.W/G.W (kgs)	25/27
Input Power(W)	110
Power Consumption(Kw-h/24h)	1.02
Loading 20'FT/40'GP/40'HQ	132/264/264
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SC136A
Unit Size (WxDxH) (mm)	495x525x825
Carton Size (WxDxH) (mm)	560x570x865
Capacity (L)	134
Temperature Range(°C)	0~10
N.W/G.W (kgs)	31/35
Input Power(W)	100
Power Consumption(Kw-h/24h)	0.93
Loading 20'FT/40'GP/40'HQ	107/252/252
Certification	CE,CB

Frameless Glass Door Retro Display Cooler

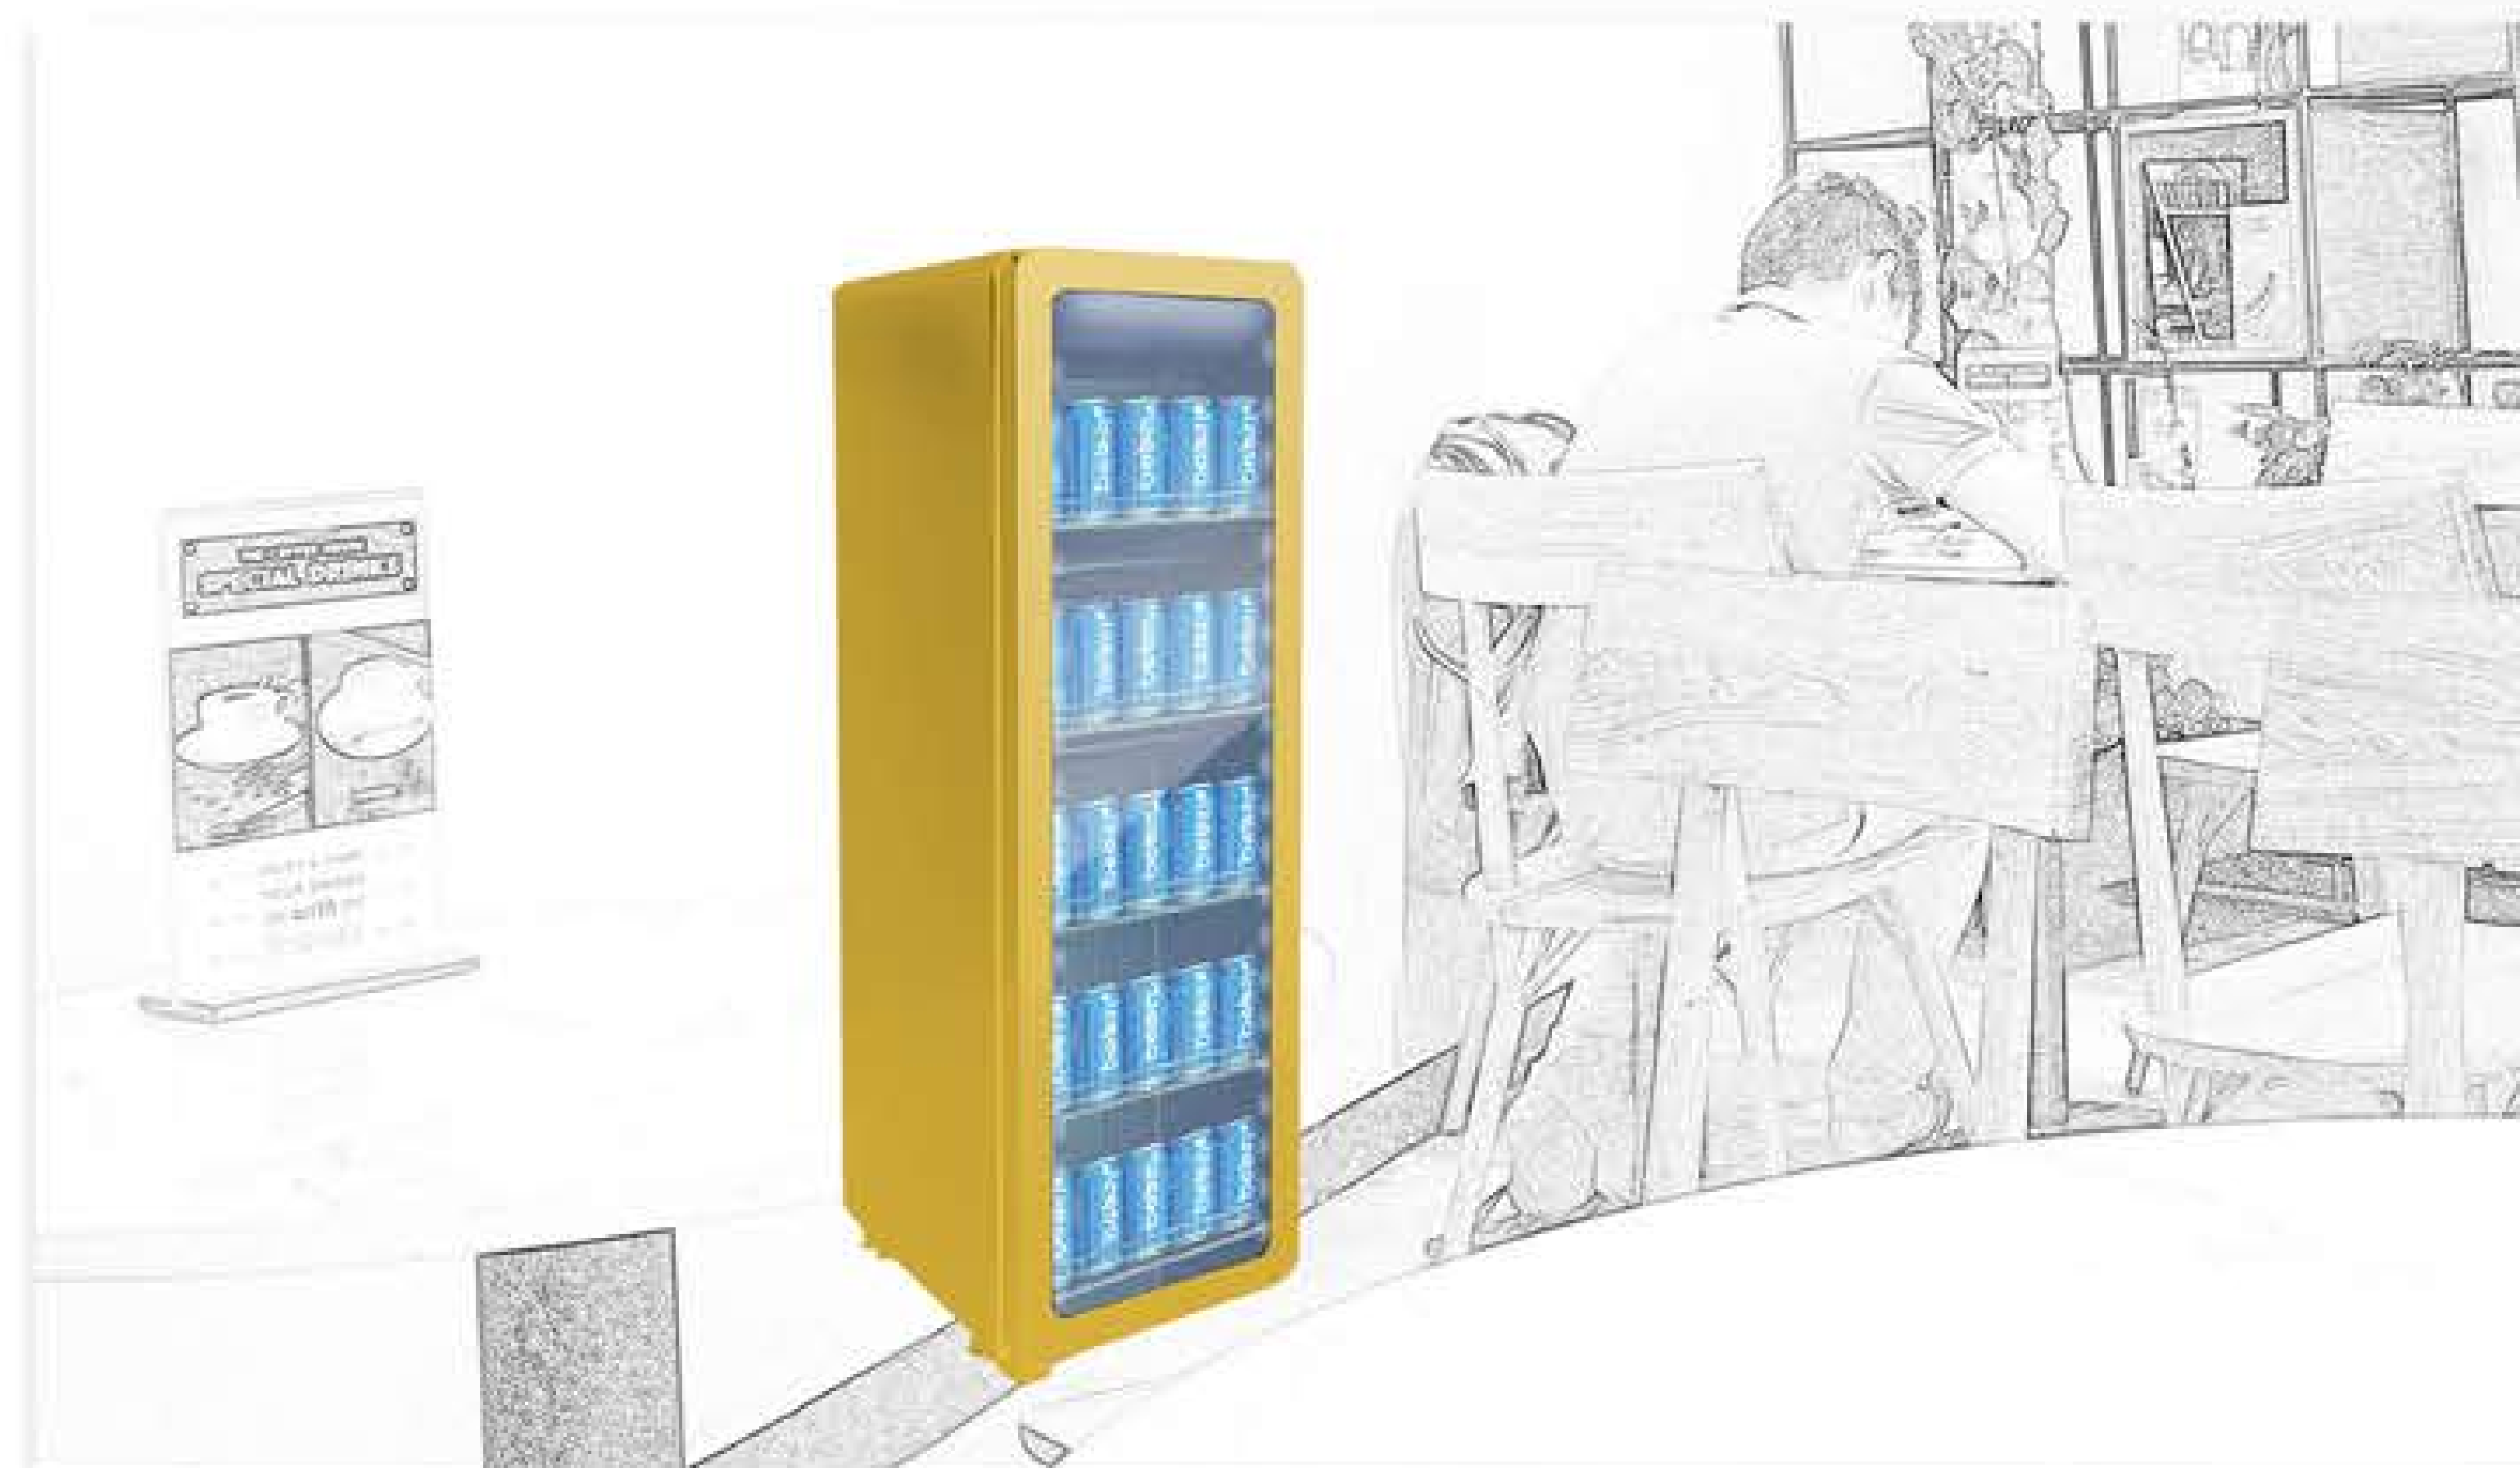

Features and Benefits

Retro design, classic forever

Power coated exterior

Low energy consumption and Low noise

Glass door with electrical heater(optional)

Fast cooling and even temperature difference in cabinet

Adjustable shelves, suit for different size of bottles and cans

Double-use shelf with chrome-painting, fit for wine and beer drinks

Multifunctioned cooler for beverage drinks&wine storage with optional wooden shelf

Certification:  CB CE SAA RoHS



Optional Details


This multi-deck retro glass door display slim cooler has 3 different liters for options, from 65 to 208L. It has a frameless glass door with a full black design. Besides, we have sensitive touch temperature controller and locks for optional functions. It can place in homes, villas, and shops for beverage, wine cooling, and display.



Retro design glass door



Sensitive touch temperature control

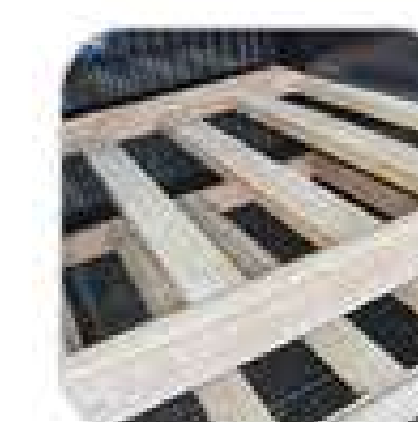

Wooden shelf



Lock



LED light



Chrome-painting wire shelf

Customized Colors



NW-BR65



NW-BR135



NW-BR208

Product Applications



Hotel




Restaurant



Bar

Product Parameters



Model No	NW-BR65
Unit Size (WxDxH) (mm)	418x496x630
Carton Size (WxDxH) (mm)	480x556x720
Capacity (L)	65
Temperature Range(°C)	0~7
N.W/G.W (kgs)	37/45
Input Power(W)	/
Power Consumption(Kw-h/24h)	/
Loading 20'FT/40'GP/40'HQ	88/192/192
Certification	CE,CB,ETL,ROHS,SAA




Model No	NW-BR135
Unit Size (WxDxH) (mm)	418x496x1410
Carton Size (WxDxH) (mm)	480x556x1500
Capacity (L)	135
Temperature Range(°C)	0~7
N.W/G.W (kgs)	55/63
Input Power(W)	/
Power Consumption(Kw-h/24h)	/
Loading 20'FT/40'GP/40'HQ	44/96/96
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-BR208
Unit Size (WxDxH) (mm)	418x496x1905
Carton Size (WxDxH) (mm)	480x556x2038
Capacity (L)	208
Temperature Range(°C)	0~7
N.W/G.W (kgs)	78/88
Input Power(W)	/
Power Consumption(Kw-h/24h)	/
Loading 20'FT/40'GP/40'HQ	55/100/100
Certification	CE,CB,ETL,ROHS,SAA

Flat Cooler

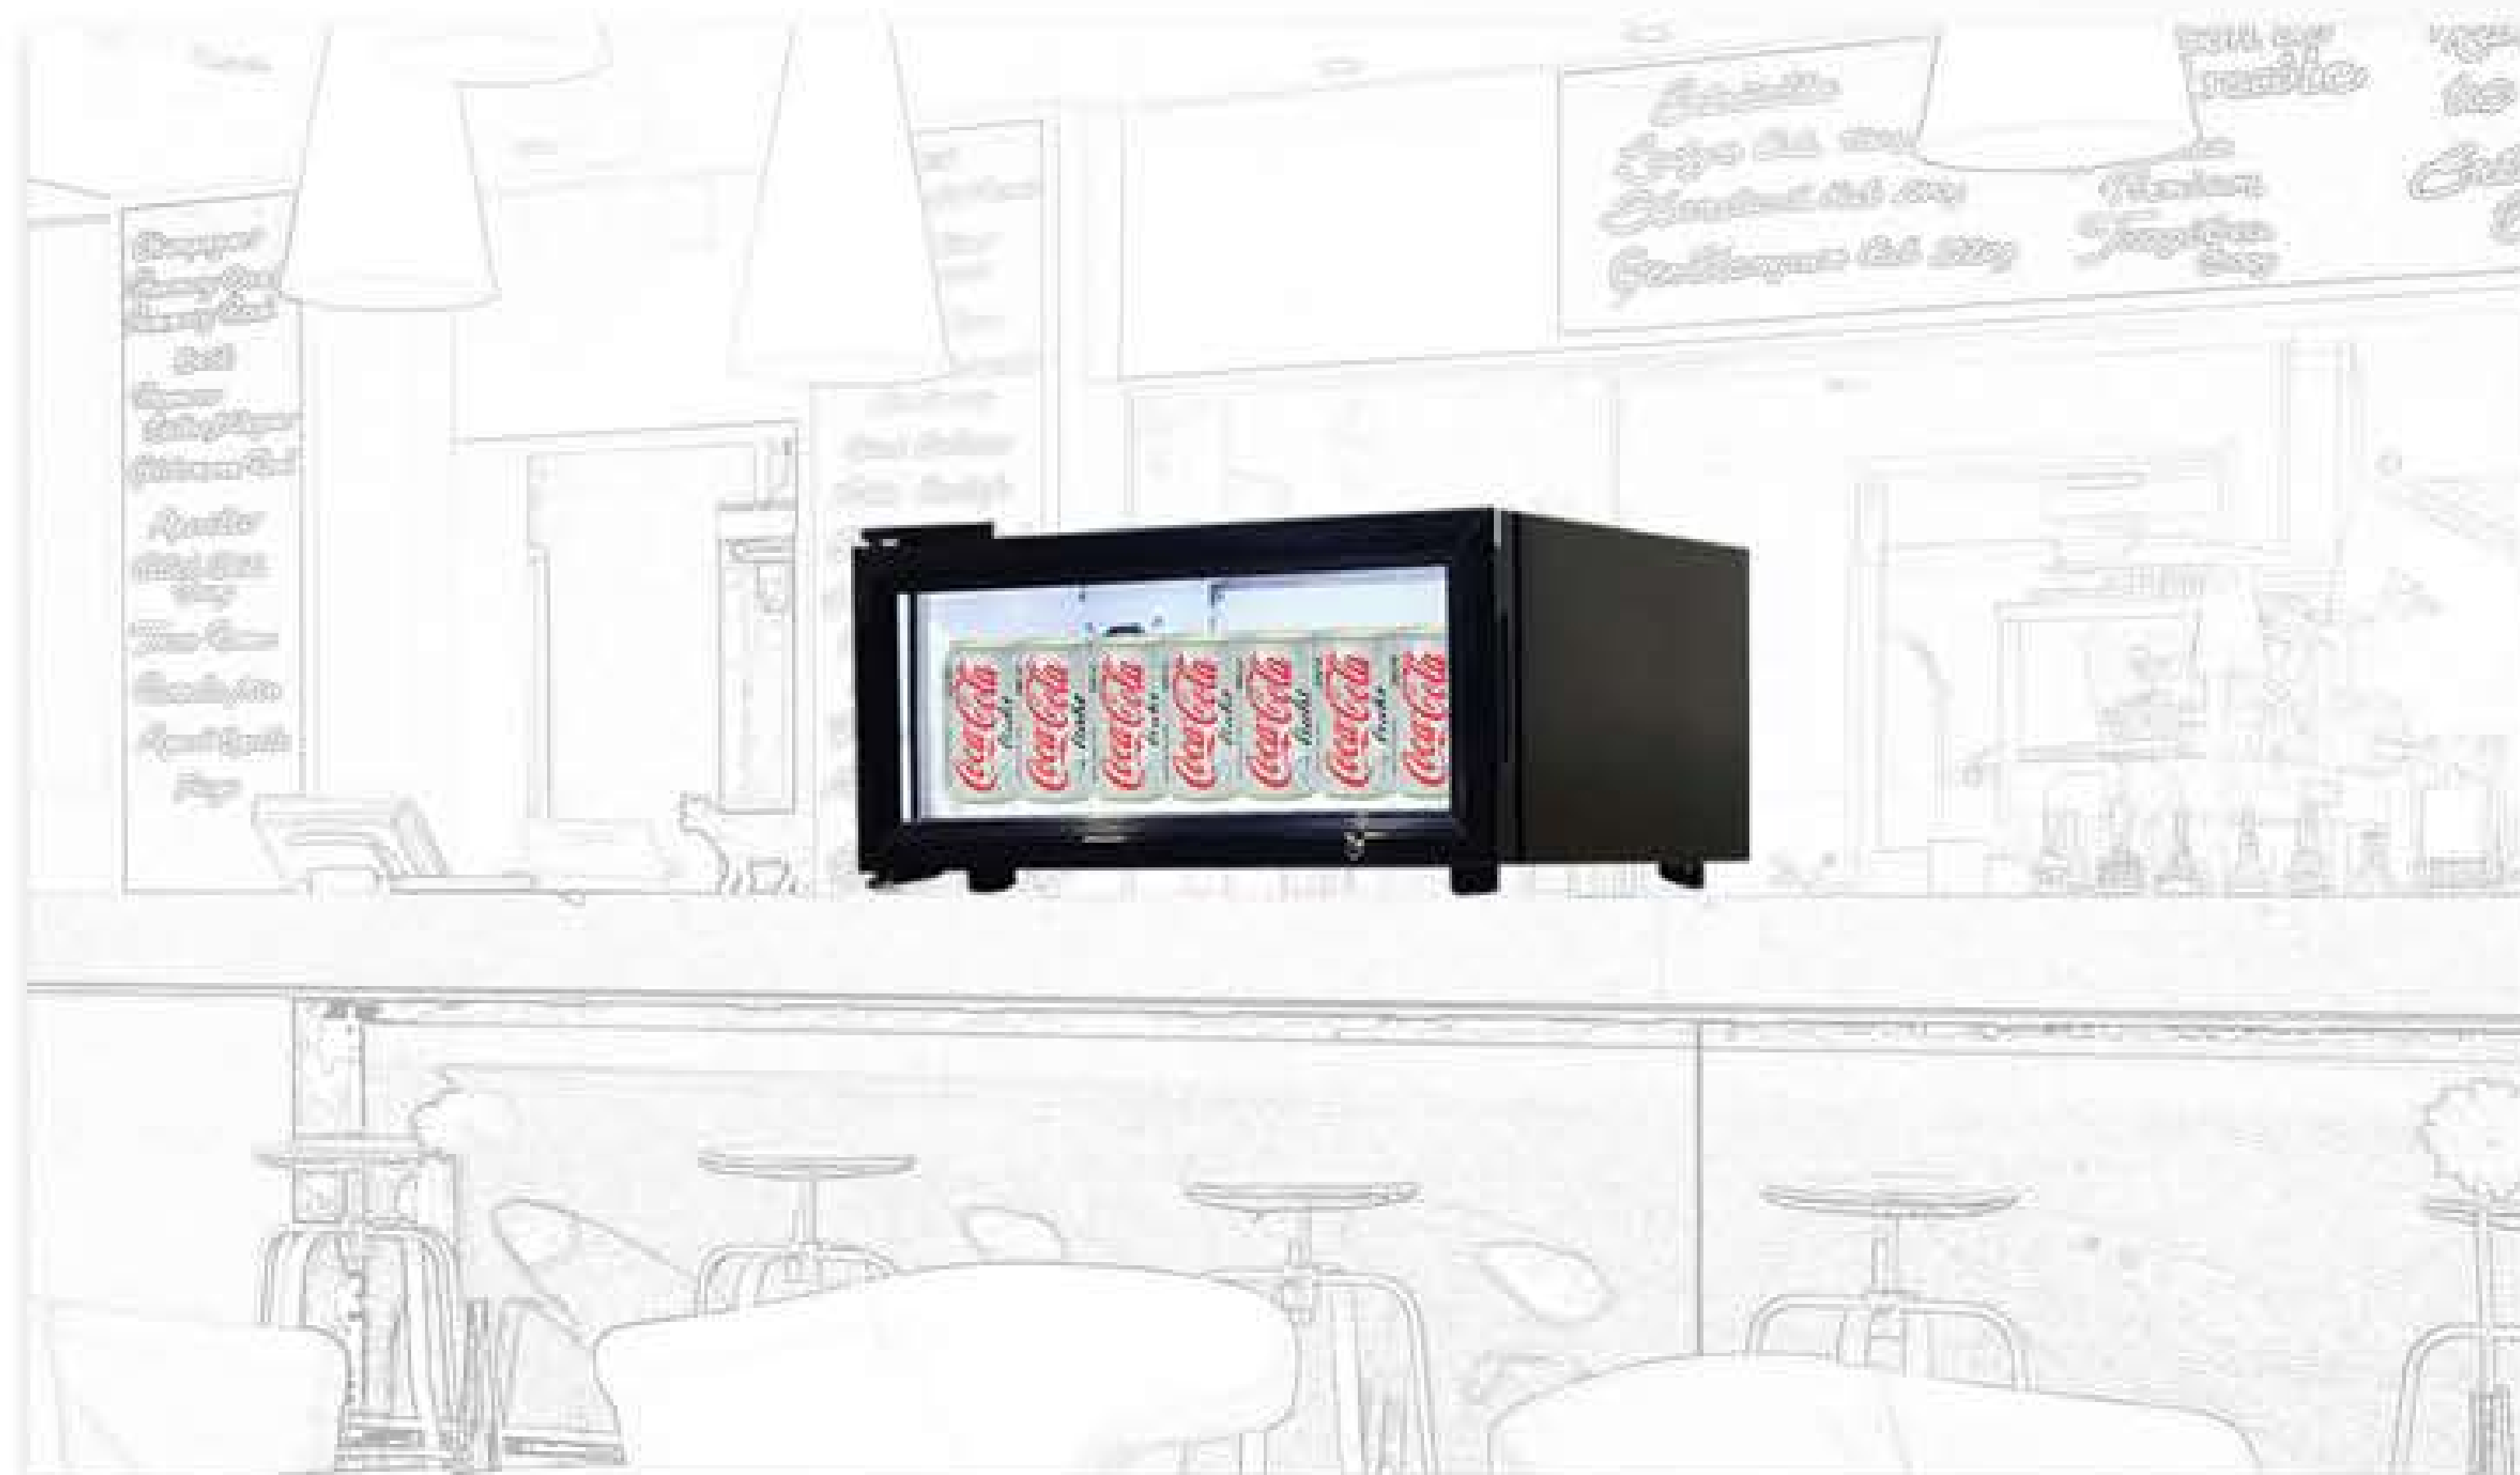

Features and Benefits

- Flat body design, perfect for layering up
- High visibility inner LED lighting
- tempered glass door
- 4 stable legs to fit any desktop
- Inner fan for even cooling
- Custom top and side stickers for brand promotion



Certification:  CB CE SAA RoHS

Optional Details

Horizontal design with a wide width to fit 1 layer of drinks. We supply this flat cooler, wide, shallow-depth, and low-height shape countertop mini cooler which is fit to some special requirements for space like the bar or the cashier counter, and other tiny POS places. We have side-open and top-open doors for your option in this series



Top open door



Digital temperature control



Internal fan



Side-open door



LED light



Recessed handle

Customized Cases



NW-SC15H



NW-SC25H




NW-SC36H

Product Applications



Product Parameters



Model No	NW-SC15H
Unit Size (WxDxH) (mm)	575x370x250
Carton Size (WxDxH) (mm)	620x425x365
Capacity (L)	15
Temperature Range(°C)	0~10
N.W/G.W (kgs)	13/14
Input Power(W)	60
Power Consumption(Kw-h/24h)	0.5
Loading 20'FT/40'GP/40'HQ	306/642/749
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SC25H
Unit Size (WxDxH) (mm)	600x475x300
Carton Size (WxDxH) (mm)	686x576x379
Capacity (L)	25
Temperature Range(°C)	0~10
N.W/G.W (kgs)	16/18.5
Input Power(W)	80
Power Consumption(Kw-h/24h)	0.6
Loading 20'FT/40'GP/40'HQ	192/408/476
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SC36H
Unit Size (WxDxH) (mm)	690x517x310
Carton Size (WxDxH) (mm)	762x590x388
Capacity (L)	36
Temperature Range(°C)	0~10
N.W/G.W (kgs)	20/22
Input Power(W)	110
Power Consumption(Kw-h/24h)	1
Loading 20'FT/40'GP/40'HQ	162/360/360
Certification	CE,CB,ETL,ROHS,SAA

Display Cooler with Light Box



Features and Benefits

- Adjustable fridge shelves
- With lightbox for brand promotion
- Self-evaporation water tray, user-friendly
- Swing door with recessed handle
- Internal light for illumination
- Lock & key for safety concerns

Certification:  CB CE SAA RoHS



Product Applications



Bar



Restaurant



Canteen



Party

Optional Details

We supply countertop cooler with lightbox from 21 to 120 liters for options. It is designed for advertising and drink displaying on the countertop in bars, shops, restaurants and hotels.



Light box



Digital temperature control



Internal fan



Lock



LED light



Shelves

Customized Cases



NW-SC21B



NW-SC40B



NW-SC52B



NW-SC68B



NW-SC80B



NW-SC120B

Product Parameters



Model No	NW-SC21B
Unit Size (WxDxH) (mm)	330x406x615
Carton Size (WxDxH) (mm)	426x486x684
Capacity (L)	21
Temperature Range(°C)	0~10
N.W/G.W (kgs)	16/18
Input Power(W)	80
Power Consumption(Kw-h/24h)	0.6
Loading 20'FT/40'GP/40'HQ	189/396/396
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SC68B
Unit Size (WxDxH) (mm)	460x460x838
Carton Size (WxDxH) (mm)	541x537x896
Capacity (L)	68
Temperature Range(°C)	0~10
N.W/G.W (kgs)	29/32
Input Power(W)	95
Power Consumption(Kw-h/24h)	0.8
Loading 20'FT/40'GP/40'HQ	80/176/264
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SC40B
Unit Size (WxDxH) (mm)	400x406x728
Carton Size (WxDxH) (mm)	464x481x787
Capacity (L)	40
Temperature Range(°C)	0~10
N.W/G.W (kgs)	20/22
Input Power(W)	80
Power Consumption(Kw-h/24h)	0.6
Loading 20'FT/40'GP/40'HQ	178/360/360
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SC80B
Unit Size (WxDxH) (mm)	460x464x928
Carton Size (WxDxH) (mm)	542x539x986
Capacity (L)	98
Temperature Range(°C)	0~10
N.W/G.W (kgs)	29/32
Input Power(W)	95
Power Consumption(Kw-h/24h)	0.8
Loading 20'FT/40'GP/40'HQ	80/176/176
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SC52B
Unit Size (WxDxH) (mm)	420x451x788
Carton Size (WxDxH) (mm)	502x529x847
Capacity (L)	52
Temperature Range(°C)	0~10
N.W/G.W (kgs)	23/25
Input Power(W)	80
Power Consumption(Kw-h/24h)	0.6
Loading 20'FT/40'GP/40'HQ	88/184/276
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SC120B
Unit Size (WxDxH) (mm)	505x540x1045
Carton Size (WxDxH) (mm)	585x610x1105
Capacity (L)	120
Temperature Range(°C)	0~10
N.W/G.W (kgs)	36/39
Input Power(W)	110
Power Consumption(Kw-h/24h)	1.3
Loading 20'FT/40'GP/40'HQ	72/152/152
Certification	CE,CB,ETL,ROHS,SAA

Display Cooler with Light Box (New Design)



Features and Benefits

Four-sided visible glass design

High impact side and flat top-lit header graphics

Inner LED lights to highlight drinks and food

Adjustable heavy-duty shelves

Certification:  CB CE SAA RoHS



Optional Details

We supply new design which is 4-sides glass display mini cooler with lightbox, can fully displayed from different perspectives. It's a special design with top advertising and 4-sides glass for business evening, product launch, shops and bars.



Four-sided visible glass design



Digital temperature control



Frameless glass door design



Inner light box



LED light



Adjustable height shelves

Customized Cases



NW-SC30G4



NW-SC68G4



NW-SC98G4

Product Applications



Restaurant




Office



Bar

Product Parameters



Model No	NW-SC30G4
Unit Size (WxDxH) (mm)	405x415x616
Carton Size (WxDxH) (mm)	482x497x658
Capacity (L)	30
Temperature Range(°C)	0~10
N.W/G.W (kgs)	32/35
Input Power(W)	160
Power Consumption(Kw-h/24h)	2.2
Loading 20'FT/40'GP/40'HQ	144/288/384
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SC68G4
Unit Size (WxDxH) (mm)	460x490x690
Carton Size (WxDxH) (mm)	508x538x735
Capacity (L)	68
Temperature Range(°C)	0~10
N.W/G.W (kgs)	40/43
Input Power(W)	160
Power Consumption(Kw-h/24h)	2.4
Loading 20'FT/40'GP/40'HQ	132/276/276
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SC98G4
Unit Size (WxDxH) (mm)	460x490x860
Carton Size (WxDxH) (mm)	508x538x905
Capacity (L)	98
Temperature Range(°C)	0~10
N.W/G.W (kgs)	45/48
Input Power(W)	180
Power Consumption(Kw-h/24h)	2.6
Loading 20'FT/40'GP/40'HQ	88/184/184
Certification	CE,CB,ETL,ROHS,SAA

Display Cooler with Light Box, Slim Upright Cooler ● ●



Features and Benefits

- slim showcase and space-saving design
- flat lightbox design
- Internal fan for better temperature circulation
- Self-evaporation water tray, user-friendly
- Interior LED light with switch
- Aluminum shelf clip with high-reliability
- Adjustable epoxy coated shelves
- With lightbox for brand promotion

Certification:  CB CE SAA RoHS



Optional Details ● ●

This slim upright single door cooler with lightbox is supplied, which only require little space for standing on the ground. It's designed for beverage branding and displaying, which suit to bars, business evening, parties, shops around the world.



Light box



Digital temperature control



Internal fan



Lock



LED light



Shelves

Customized Cases ● ●



NW-SC105B



NW-SC145B



NW-SC135BG

Product Applications



Bar




Restaurant



Canteen

Product Parameters



Model No	NW-SC105B
Unit Size (WxDxH) (mm)	360x385x1880
Carton Size (WxDxH) (mm)	456x461x1959
Capacity (L)	105
Temperature Range(°C)	0~10
N.W/G.W (kgs)	51/55
Input Power(W)	140
Power Consumption(Kw-h/24h)	1.8
Loading 20'FT/40'GP/40'HQ	60/130/130
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SC145B
Unit Size (WxDxH) (mm)	420x445x1880
Carton Size (WxDxH) (mm)	502x529x1959
Capacity (L)	145
Temperature Range(°C)	0~10
N.W/G.W (kgs)	54/58
Input Power(W)	140
Power Consumption(Kw-h/24h)	1.8
Loading 20'FT/40'GP/40'HQ	44/92/92
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SC135BG
Unit Size (WxDxH) (mm)	420x440x1750
Carton Size (WxDxH) (mm)	505x530x1785
Capacity (L)	135
Temperature Range(°C)	0~10
N.W/G.W (kgs)	48/52
Input Power(W)	150
Power Consumption(Kw-h/24h)	1.35
Loading 20'FT/40'GP/40'HQ	44/92/92
Certification	CE,CB,ETL,ROHS,SAA

Display Cooler with Light Box, Slim Upright Cooler ● ●



Features and Benefits

Direct cold air circulation

Mechanical thermostat, digital temperature display

Adjustable shelves

Illuminated interior and branding canopy

Certification:  CB CE SAA RoHS



Product Applications



Bar



Restaurant



Canteen

Optional Details ● ●

We supply slim upright cooler without lightbox, which can also advertise through stickers around the cabinet. It's designed for bars, stores, hotels, restaurants.



Round corner door



Digital temperature control



Internal fan



Lock



LED light



Shelves

Customized Colors ● ●



NW-SC150



NW-SC275



NW-SC125



NW-SC198



NW-SC410

Product Parameters



Model No	NW-SC125
Unit Size (WxDxH) (mm)	445x520x1425
Carton Size (WxDxH) (mm)	500x575x1475
Capacity (L)	125
Temperature Range(°C)	0~10
N.W/G.W (kgs)	42/45
Input Power(W)	120
Power Consumption(Kw-h/24h)	1.9
Loading 20'FT/40'GP/40'HQ	44/92/92
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SC150
Unit Size (WxDxH) (mm)	400x485x1711
Carton Size (WxDxH) (mm)	545x690x1970
Capacity (L)	150
Temperature Range(°C)	0~10
N.W/G.W (kgs)	49/51
Input Power(W)	155
Power Consumption(Kw-h/24h)	2
Loading 20'FT/40'GP/40'HQ	50/105/105
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SC198
Unit Size (WxDxH) (mm)	445x520x1925
Carton Size (WxDxH) (mm)	500x575x1975
Capacity (L)	198
Temperature Range(°C)	0~10
N.W/G.W (kgs)	57/60
Input Power(W)	160
Power Consumption(Kw-h/24h)	2.8
Loading 20'FT/40'GP/40'HQ	44/92/92
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SC275
Unit Size (WxDxH) (mm)	445x635x1934
Carton Size (WxDxH) (mm)	506x690x1970
Capacity (L)	275
Temperature Range(°C)	0~10
N.W/G.W (kgs)	58/60
Input Power(W)	180
Power Consumption(Kw-h/24h)	2.9
Loading 20'FT/40'GP/40'HQ	33/66/66
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SC410
Unit Size (WxDxH) (mm)	620x675x2010
Carton Size (WxDxH) (mm)	680x725x2070
Capacity (L)	410
Temperature Range(°C)	0~10
N.W/G.W (kgs)	63/67
Input Power(W)	320
Power Consumption(Kw-h/24h)	4.2
Loading 20'FT/40'GP/40'HQ	16/32/32
Certification	CE,CB,ETL,ROHS,SAA

Mini Display Freezer



Features and Benefits

- Transparent tempered glass door
- Customized top and side stickers for brand display
- Small size to fit any compact point of sales
- Adjustable heavy-duty shelves
- Interior LED light for illumination and attraction
- Adjustable shelves to fit any shape of frozen snacks
- Lock & key for safety concerns

Certification:  **CB CE SAA RoHS**



Product Applications



Cake bakery



Convenience shop



Bar



Restaurant

Optional Details

We supply 6 options display freezer from 12 to 98 liters for choices. Stickers can be designed around the cabinet. It's designed for requirement of ice-cream, frozen food in convenient shops, restaurants.



Digital thermameter



Digital temperature control



Internal fan



Lock



LED light



Shelves

Customized Cases



NW-SD16



NW-SD21



NW-SD48



NW-SD55



NW-SD70



NW-SD98

Product Parameters



Model No	NW-SD16
Unit Size (WxDxH) (mm)	330x361x450
Carton Size (WxDxH) (mm)	395x425x500
Capacity (L)	12
Temperature Range(°C)	-25~-18
N.W/G.W (kgs)	20/22
Input Power(W)	65
Power Consumption(Kw-h/24h)	1.2
Loading 20'FT/40'GP/40'HQ	176/368/368
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SD55
Unit Size (WxDxH) (mm)	595x530x625
Carton Size (WxDxH) (mm)	681x591x690
Capacity (L)	55
Temperature Range(°C)	-25~-18
N.W/G.W (kgs)	38/42
Input Power(W)	155
Power Consumption(Kw-h/24h)	2
Loading 20'FT/40'GP/40'HQ	81/162/162
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SD21
Unit Size (WxDxH) (mm)	380x438x520
Carton Size (WxDxH) (mm)	454x517x600
Capacity (L)	21
Temperature Range(°C)	-25~-18
N.W/G.W (kgs)	22/24
Input Power(W)	130
Power Consumption(Kw-h/24h)	1.2
Loading 20'FT/40'GP/40'HQ	165/330/440
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SD70
Unit Size (WxDxH) (mm)	480x485x850
Carton Size (WxDxH) (mm)	560x560x923
Capacity (L)	70
Temperature Range(°C)	-25~-18
N.W/G.W (kgs)	42/45
Input Power(W)	155
Power Consumption(Kw-h/24h)	2.4
Loading 20'FT/40'GP/40'HQ	80/168/168
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SD48
Unit Size (WxDxH) (mm)	435x511x695
Carton Size (WxDxH) (mm)	492x582x755
Capacity (L)	48
Temperature Range(°C)	-25~-18
N.W/G.W (kgs)	36/40
Input Power(W)	230
Power Consumption(Kw-h/24h)	2.8
Loading 20'FT/40'GP/40'HQ	66/132/132
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SD98
Unit Size (WxDxH) (mm)	595x545x850
Carton Size (WxDxH) (mm)	681x591x916
Capacity (L)	98
Temperature Range(°C)	-25~-18
N.W/G.W (kgs)	50/54
Input Power(W)	158
Power Consumption(Kw-h/24h)	3.3
Loading 20'FT/40'GP/40'HQ	54/120/120
Certification	CE,CB,ETL,ROHS,SAA

Display Freezer with Light Box



Features and Benefits

- Attention-garbbing lightbox design
- Heating glass door and automatic closing door
- Lock & Key for safety concerns
- Digital thermostat temperature display
- Mini size fit for desktop display
- Transparent tempered glass door
- Interior LED light with switch
- Adjustable heavy-duty shelf

Certification: **CB CE SAA RoHS**



Product Applications



Bar



Restaurant



Canteen



Party

Optional Details

This type of Display freezer with lightbox have 7 options from 21 to 60 liters for choices, which is satisfy the requirement of manufacturer to advertise products. It's designed most for shops, restaurants for advertising.



Digital thermameter



Digital temperature control



Internal fan



Lock



LED light



Shelves

Customized Cases



NW-SD21B



NW-SD40B



NW-SD50B



NW-SD55B



NW-SD60B



NW-SD70B



NW-SD98B

Product Parameters



Model No	NW-SD21B
Unit Size (WxDxH) (mm)	380x438x660
Carton Size (WxDxH) (mm)	454x517x740
Capacity (L)	21
Temperature Range(°C)	-25~-18
N.W/G.W (kgs)	25/27
Input Power(W)	150
Power Consumption(Kw-h/24h)	1.2
Loading 20'FT/40'GP/40'HQ	165/330/330
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SD40B
Unit Size (WxDxH) (mm)	420x470x793
Carton Size (WxDxH) (mm)	485x565x853
Capacity (L)	40
Temperature Range(°C)	-25~-18
N.W/G.W (kgs)	31/33
Input Power(W)	170
Power Consumption(Kw-h/24h)	2.1
Loading 20'FT/40'GP/40'HQ	96/288/288
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SD50B
Unit Size (WxDxH) (mm)	460x447x855
Carton Size (WxDxH) (mm)	541x537x910
Capacity (L)	50
Temperature Range(°C)	-25~-18
N.W/G.W (kgs)	33/35
Input Power(W)	178
Power Consumption(Kw-h/24h)	2.2
Loading 20'FT/40'GP/40'HQ	80/176/176
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SD55B
Unit Size (WxDxH) (mm)	595x550x766
Carton Size (WxDxH) (mm)	681x591x850
Capacity (L)	55
Temperature Range(°C)	-25~-18
N.W/G.W (kgs)	41/45
Input Power(W)	175
Power Consumption(Kw h/24h)	2
Loading 20'FT/40'GP/40'HQ	54/120/180
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SD70B
Unit Size (WxDxH) (mm)	480x485x990
Carton Size (WxDxH) (mm)	560x560x1183
Capacity (L)	70
Temperature Range(°C)	-25~-18
N.W/G.W (kgs)	42/45
Input Power(W)	175
Power Consumption(Kw h/24h)	2.4
Loading 20'FT/40'GP/40'HQ	80/168/168
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SD60B
Unit Size (WxDxH) (mm)	460x500x876
Carton Size (WxDxH) (mm)	540x560x956
Capacity (L)	60
Temperature Range(°C)	-25~-18
N.W/G.W (kgs)	40/44
Input Power(W)	230
Power Consumption(Kw h/24h)	2
Loading 20'FT/40'GP/40'HQ	80/168/168
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SD98B
Unit Size (WxDxH) (mm)	595x510x1005
Carton Size (WxDxH) (mm)	681x591x1084
Capacity (L)	98
Temperature Range(°C)	-25~-18
N.W/G.W (kgs)	53/58
Input Power(W)	178
Power Consumption(Kw h/24h)	3.3
Loading 20'FT/40'GP/40'HQ	54/120/120
Certification	CE,CB,ETL,ROHS,SAA

Slim Upright Freezer with Light Box



Features and Benefits

- Inner fan for even cooling
- Attention-grabbing lightbox design
- Slim showcase and space-saving design
- Self-evaporation water tray, user-friendly
- Interior LED light with switch
- Aluminum shelf clip with high-reliability
- Heating glass door and automatic closing door

Certification:  CB CE SAA RoHS



Optional Details

We supply slim upright freezer with lightbox, which has more space to frozen food, from 105 to 230 liters. It's designed for brand advertising and frozen food displaying in the supermarkets, shops, hotels and ect..



Light box



Digital temperature control



Internal fan



Lock



LED light



Shelves

Customized Cases



NW-SD105B



NW-SD150B



NW-SD235B

Product Applications



Supermarket



Restaurant



Convenience shop

Product Parameters



Model No	NW-SD105B
Unit Size (WxDxH) (mm)	420x430x1845
Carton Size (WxDxH) (mm)	502x529x1959
Capacity (L)	105
Temperature Range(°C)	-25~-18
N.W/G.W (kgs)	65/70
Input Power(W)	180
Power Consumption(Kw-h/24h)	2.4
Loading 20'FT/40'GP/40'HQ	44/92/92
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SD150B
Unit Size (WxDxH) (mm)	440x625x1880
Carton Size (WxDxH) (mm)	500x685x1940
Capacity (L)	150
Temperature Range(°C)	-25~-18
N.W/G.W (kgs)	75/79
Input Power(W)	330
Power Consumption(Kw-h/24h)	6.5
Loading 20'FT/40'GP/40'HQ	32/68/68
Certification	CE,CB,ETL,ROHS,SAA



Model No	NW-SD235B
Unit Size (WxDxH) (mm)	585x625x1880
Carton Size (WxDxH) (mm)	645x685x1940
Capacity (L)	230
Temperature Range(°C)	-25~-18
N.W/G.W (kgs)	92/98
Input Power(W)	365
Power Consumption(Kw-h/24h)	8.7
Loading 20'FT/40'GP/40'HQ	27/54/54
Certification	CE,CB,ETL,ROHS,SAA